




Auswechslung des why! W253EU Ventilator

Fan expose either to clean or replace him.

Written By: Felice Suglia




Step 1 — battery pack

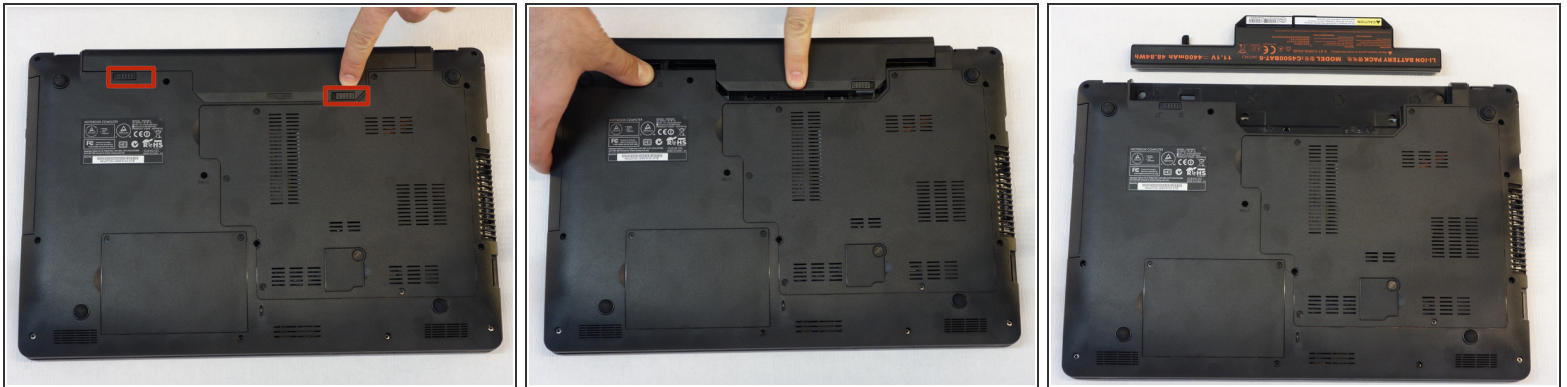


- off computer.
- Before each handle, it is important to start the expansion of the accumulator.
- bring in unlocked position slider Removing the battery.

Step 2 — Access to RAM memory and CPU

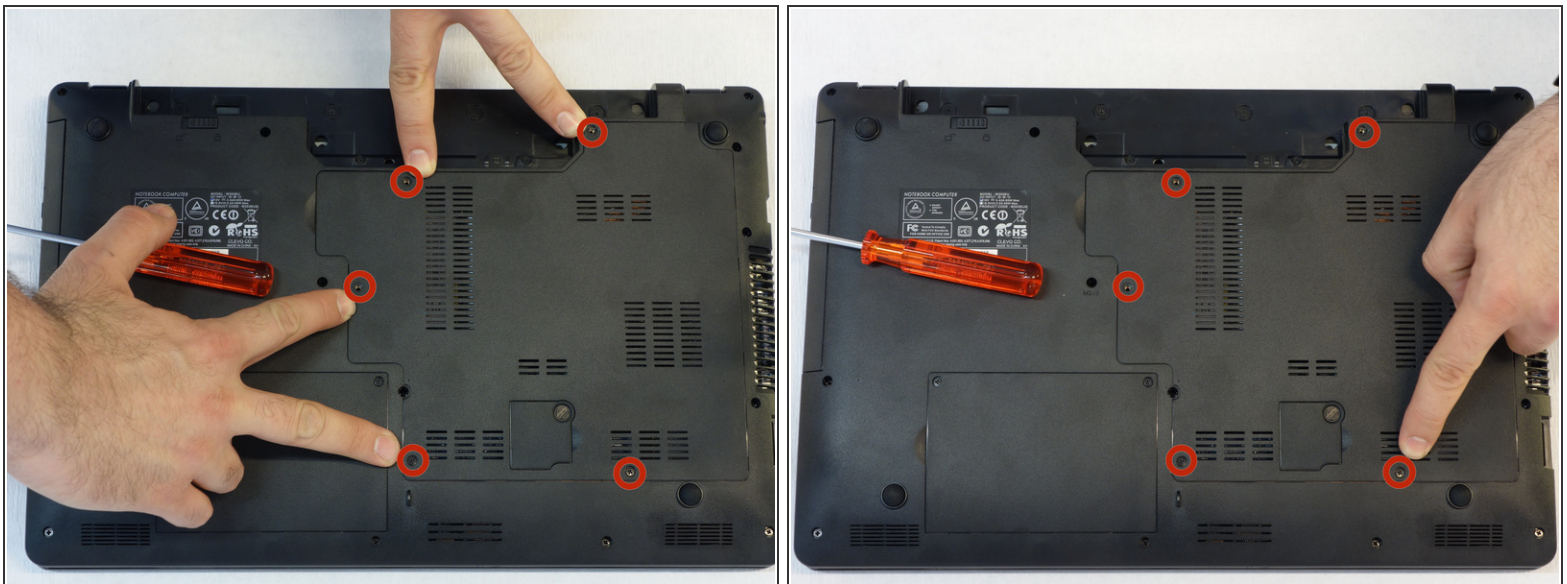


- With the screwdriver Philips # 1, screw the 5 screws securing the cover off.

Step 3

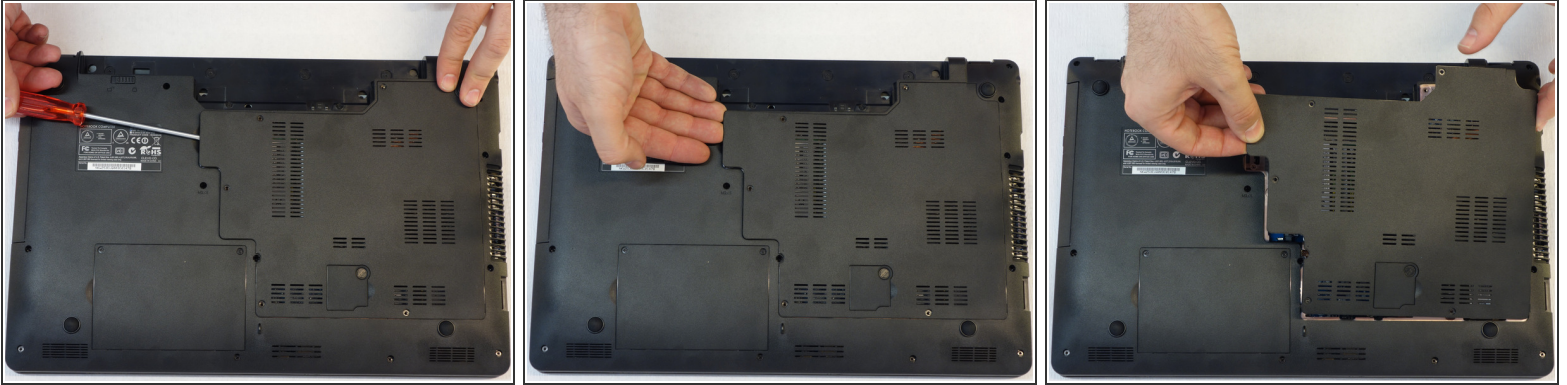



- Screwdriver a few millimeters under the cover slide so that it can then be handled with the fingers.
- Cover now lifting carefully.
- Attention! Ventilatorkabel separate so that the cover can be removed completely (see next step).

Step 4

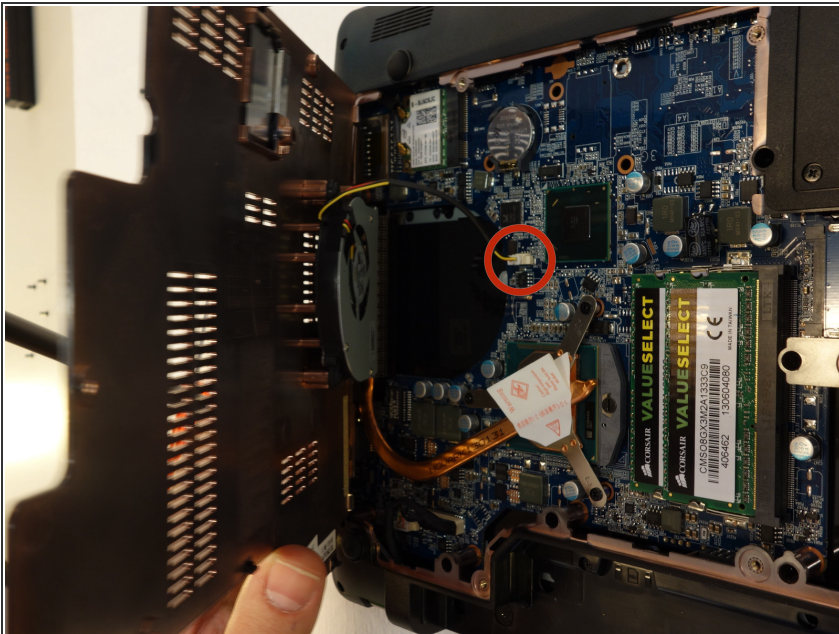

- Since the ventilátor is fixed under the cover, be power cord must first be separated so that the cover can then be completely removed.

Step 5 — Ventilator

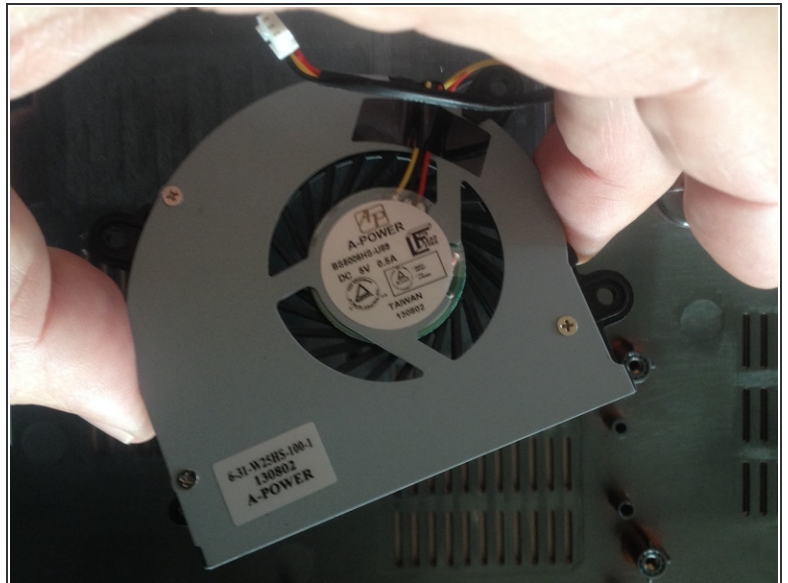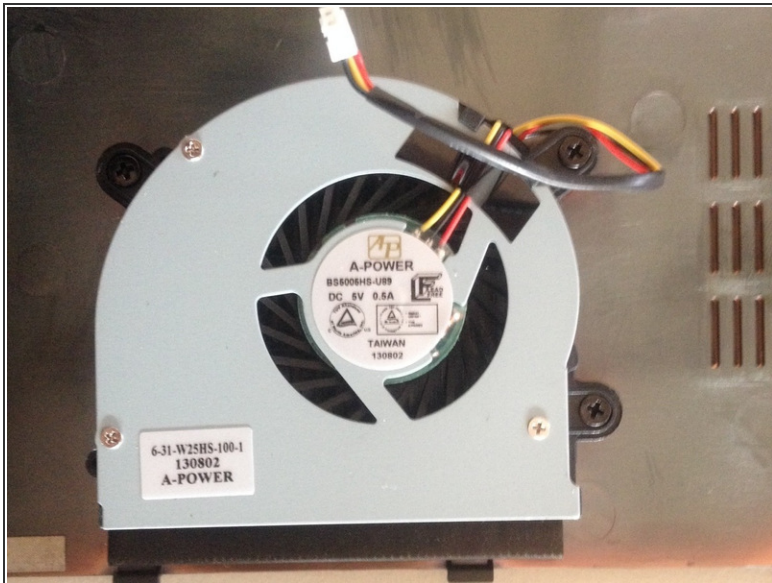

- Loosen the 3 screws on the bottom of the ventilátor Grätes fasten with the Philips screwdriver.

Um die Maschine wieder zusammen zu bauen, oben aufgeführte Instruktionen in umgekehrter Reihenfolge ausführen.

This document was last generated on 2017-07-02 04:14:29 PM.